




66 Block Interface Unit

Wall Mount

BJ-1746

Application

66 block interface provides a DS-1 connection point between the facility providers network interface and the end user's terminal equipment. It has the capability for connecting 12 DS-1 facilities. The 12 RJ-48 jacks are spaced specifically to accommodate the use of modular wire plugs with wide housing.

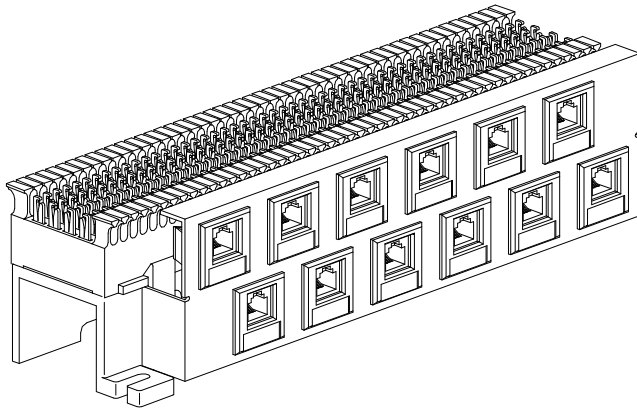

12 Circuits

Specifications


Capacity: 12 Modular Jacks (A,B)
6 Modular Jacks (F,G)

Dimensions: 10" H X 3.5" W X 3" D (A,B)
5" H X 3.5" W X 3" D (F,G)

Weight: 3 lbs. (A,B,)
1.5 lbs. (F,G)

Features

- Standard 66 quick connect block
- RJ-48C or RJ-48X type modular jack
- Wide spacing between jacks for simple installation
- Clear plastic snap-on cover with spaces for circuit assignments
- Arrows on block show direction of signal transmission

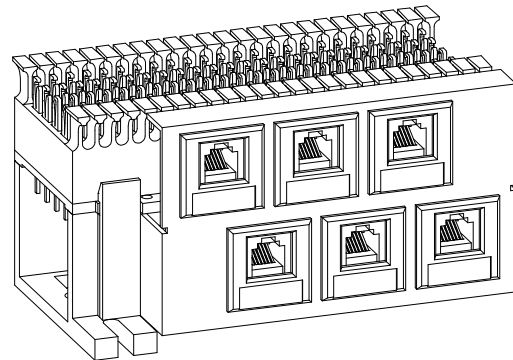

Six Circuits

Ordering Information

Part Number	Description
BJ-1746A	66 block to 12 RJ-48C interface
BJ-1746B	66 block to 12 RJ-48X interface
BJ-1746F	66 block to 6 RJ-48C interface
BJ-1746G	66 block to 6 RJ-48X interface

